

SHACKLES - Safety Type

Green Pin® Dee Shackle BN

Standard dee shackle with safety bolt

Product details

Productcode

G-4153

Material

bow and pin high tensile steel,
Grade 6, quenched and tempered

Safety factor

MBL equals 6 x WLL

Finish

hot dipped galvanized


Temp. range

-40°C up to +200°C

Certification

Standard

EN 13889, ASME B30.26 and meets performance requirements of US Fed. Spec. RR-C-271 Type IVB Class 3, Grade A

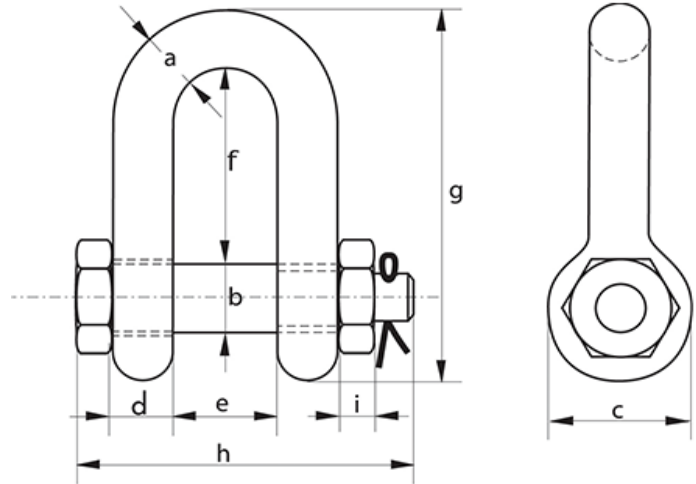

Article code	working load limit (ton)	A	B	C	D	E	F	G	H	I	Net weight (KG)
GPGDMB13	2	13,5	16	34	13	22	43	82	80	13	0,39
GPGDMB16	3,25	16	19	40	16	27	51	97	98	17	0,67
GPGDMB19	4,75	19	22	46	19	31	59	112	115	19	1,08
GPGDMB22	6,5	22	25	52	22	36	73	134	130	22	1,66
GPGDMB25	8,5	25	28	59	25	43	85	154	150	25	2,46
GPGDMB28	9,5	28	32	67	28	47	90	168	166	27	3,40
GPGDMB32	12	32	35	73	32	51	94	180	184	30	4,51
GPGDMB35	13,5	35	38	79	35	57	115	209	197	33	6,10
GPGDMB38	17	38	42	88	38	60	127	230	202	19	7,63
GPGDMB45	25	45	50	104	45	74	149	271	243	23	12,9
GPGDMB50	35	50	57	112	50	83	171	306	269	26	17,4
GPGDMB57	42,5	57	65	132	57	95	190	346	301	29	25,9
GPGDMB65	55	65	70	145	65	105	203	376	329	32	35,3
GPGDMB75	85	75	83	167	75	127	229	429	381	39	53,0